




OLA 2 S

Type:OLA 2/1400.2S

ID:OL100/2/2S



ISO 9001: 2000

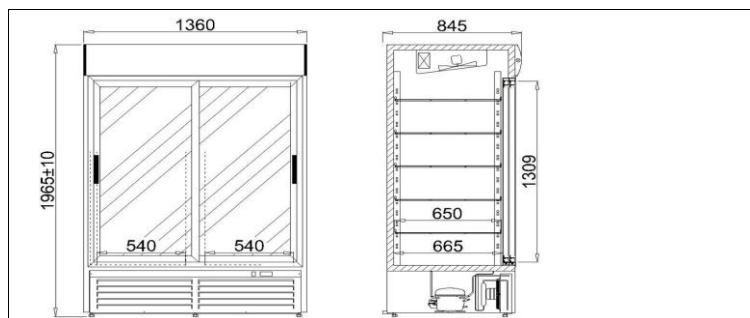


STANDARD

- refrigerating unit fitting - lower
- external housing of zinc coated plate, powder painted white
- unit interior made of stainless plate
- sliding door with combined glass, self-closing
- internal light switch
- forced air circulation
- automatic defrosting
- condensate outlet to container
- sound alarm indicating condenser impurity or fan operation failure*
- electronic controller with digital temperature display
- ecological polyurethane foam insulation
- interior light
- illuminated top panel (advertising ceiling light fitting) - color selection possible
- 10 metal net plastic supported shelves, including position adjustment + handle set
- device levelling stands
- * only when using IGLOO thermostat

Colour scheme

Paint colors



Plexiglass colors



KOLOR WG WZORNIKA IGLOO

Technical parameters

Cooling factor	R507
Length [mm]	1360
Depth[mm]	820
Maximum load of one shelf [kg]	30
Cooling power [W]	738
Rated power [W]	749
Rated power of lighting [W]	72
Rated voltage [V]	230/50Hz
Usable capacity [dm ³]	1400
Show window area [m ²]	1,41
Evaporation temperature To [°C]	-15
Unit weight [kg]	240
Height [mm]	1965+/-10
Range of temperature [°C]	+2/+8
Electricity consumption [kWh/24h]	9,0

Additional chooser options

- GN 1/1 catering containers - available depth 20 mm
- GN 1/1 catering containers - available depth 40 mm
- GN 1/1 catering containers - available depth 65 mm
- GN 1/1 catering containers - available depth 100 mm
- GN 1/1 catering containers - available depth 150 mm
- GN 1/1 catering containers - available depth 200 mm

Additional options add. cost

- external housing of stainless plate
- door lock with key
- automatic condensate vaporization
- temperature recorder *
- extra interior light
- external housing of zinc coated plate, powder painted - color selection possible
- extra plastified metal reticulated shelf, strengthened + fixture set
- Surcharge to a chrome supported shelf
- extra chromium plated reticulated shelf, strengthened + fixture set

-Air temperature + 25 °C, air humidity 65% -Data alteration reserved * -only using IGLOO thermostat