




OLA 2 P

Type:OLA 2/1400.P

ID:OL100/2/P



Management Service
ISO 9001: 2000

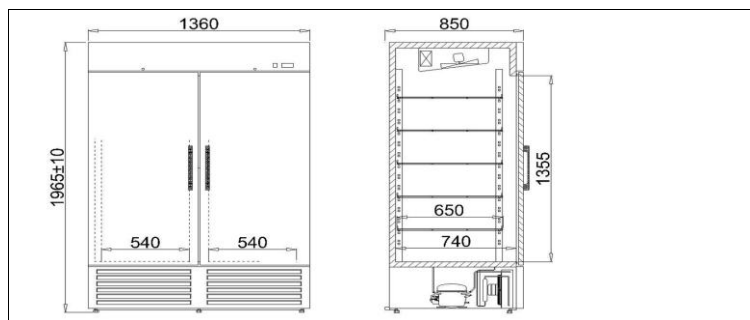


STANDARD

- refrigerating unit fitting - lower
- external housing of zinc coated plate, powder painted white
- unit interior made of stainless plate
- spreading door - full
- forced air circulation
- automatic defrosting
- condensate outlet to container
- sound alarm indicating condenser impurity or fan operation failure*
- electronic controller with digital temperature display
- ecological polyurethane foam insulation
- 10 metal net plastic supported shelves, including position adjustment + handle set
- device levelling stands
- * only when using IGLOO thermostat

Colour scheme

Paint colors



Plexiglass colors



KOLOR WG WZORNIKA IGLOO

Technical parameters

Cooling factor	R507
Length [mm]	1360
Depth[mm]	825
Maximum load of one shelf [kg]	30
Cooling power [W]	738
Rated power [W]	677
Rated voltage [V]	230/50Hz
Usable capacity [dm ³]	1400
Evaporation temperature To [°C]	-15
Unit weight [kg]	210
Height [mm]	1965+/-10
Range of temperature [°C]	+2/+8
Electricity consumption [kWh/24h]	8,1

Additional chooser options

- GN 1/1 catering containers - available depth 20 mm
- GN 1/1 catering containers - available depth 40 mm
- GN 1/1 catering containers - available depth 65 mm
- GN 1/1 catering containers - available depth 100 mm
- GN 1/1 catering containers - available depth 150 mm
- GN 1/1 catering containers - available depth 200 mm

Additional options add. cost

- external housing of stainless plate
- horizontal door split
- spreading door self-closer
- fan stopping switch
- door lock with key
- automatic condensate vaporization
- temperature recorder *
- external housing of zinc coated plate, powder painted - color selection possible
- extra plastified metal reticulated shelf, strengthened + fixture set
- Surcharge to a chrome supported shelf
- extra chromium plated reticulated shelf, strengthened + fixture set
- GN container guides

-Air temperature + 25 °C, air humidity 65% -Data alteration reserved * -only using IGLOO thermostat