




SANTIAGO (S)

Type: SANTIAGO 2.1S

ID: SA103



Management Service
ISO 9001: 2000

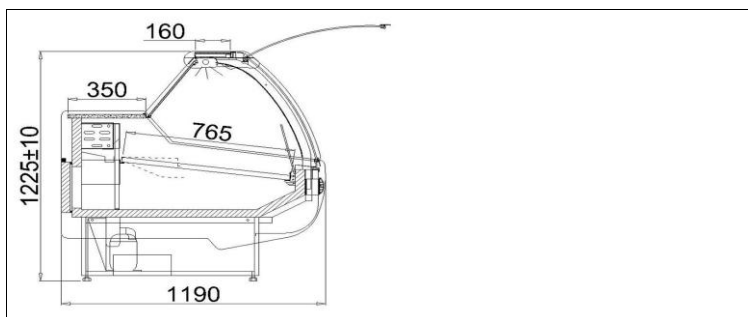


STANDARD

- internal refrigerating unit
- external housing made of zinc coated plate powder painted - white
- storage chamber made of stainless plate
- exposition area made of stainless plate
- aluminium sections - color selection possible - silver/gold
- electronic control with digital temperature display
- gravitational cooling
- automatic defrosting
- condensate outlet to container
- sound alarm indicating condenser impurity or fan operation failure*
- front panel warm air blast
- work surface - granite, grey
- front panel lifting telescopic system
- light - "meat" fluorescent lamp
- night roller blind
- back door
- ecological polyurethane foam insulation
- side panels of ABS plastic - color selection possible
- front fender - color selection possible
- device levelling stands

Colour scheme

Paint colors



Base fender colors



KOLOR WG WZORNIKA IGLOO

Granite colors



Aluminium sections colors



KOLOR WG WZORNIKA IGLOO

ABS sides



KOLOR WG WZORNIKA IGLOO

Technical parameters

| | |
|--|-----------|
| Cooling factor | R507 |
| Length with sides [mm] | 2000 |
| Depth [mm] | 1190 |
| Side thickness [mm] | 40 |
| Cooling power [W] | 634 |
| Rated power [W] | 541 |
| Rated power of lighting [W] | 58 |
| Rated voltage [V] | 230/50Hz |
| Shelf load [kg/linear metre] | 50 |
| Usable capacity of cold chamber [dm ³] | 325 |
| Cooling area of shelves [m ²] | 1,5 |
| Evaporation temperature To [°C] | -15 |
| Unit weight [kg] | 220 |
| Height [mm] | 1225+/-10 |
| Range of temperature [°C] | +2/+8 |
| Cooling power demand [W/linear metre] | 350 |
| Electricity consumption [kWh/24h] | 8,7 |

Additional chooser options

- light - "white" fluorescent lamp
- light - "confectionery" fluorescent lamp
- front shelf for client

Additional options add. cost

- automatic condensate vaporization
- work surface - granite, Balmoral
- extra charge on front panel and/or base colour - colour selection possible
- temperature recorder *
- plug with fuse
- step exposition shelf (2 or 3 steps)
- Fixed vertical barrier (from the length of 1,7 up to 2,5)
- movable glass partition

-Air temperature + 25 °C, air humidity 65% -Data alteration reserved * -only using IGLOO thermostat