


BARBADOS MOD/C

Type: *BARBADOS 110*
1.25-mod/C
ID:BR102



Management Service
ISO 9001: 2000

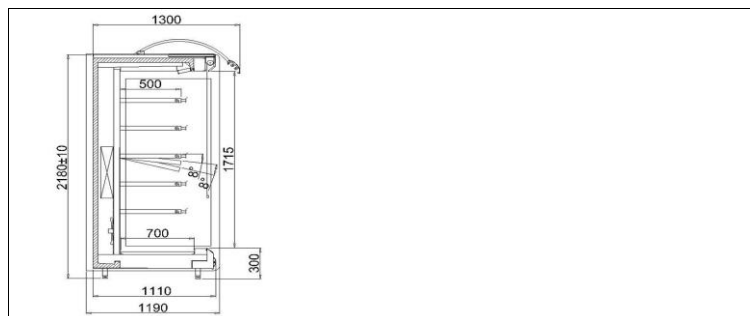

STANDARD

- top lamp
- device available for line setup
- powered only by external refrigerating unit
- Cupboard inside and exposition shelves made of white powder-painted tinplate
- price strips - color selection possible
- extra shelves lightning
- forced air circulation
- automatic defrosting
- condensate outlet to container
- meat hooks - long
- top full panel
- night roller blind - electric
- ecological polyurethane foam insulation
- device levelling stands
- * only using IGLOO thermostat

Colour scheme

Paint colors



Base fender colors



ABS sides



Technical parameters

Cooling factor	R404A / R507
Length without sides [mm]	1250
Depth[mm]	1110
Side thickness [mm]	40
Maximum shelf load [kg/linear metre]	50
Rated power [W]	82
Rated power of lighting [W]	72
Rated voltage [V]	230/50Hz
Usable capacity [dm ³]	1500
Cooling area of shelves [m ²]	4,0
Show window area [m ²]	2,14
Evaporation temperature To [°C]	-10
Unit weight [kg]	250
Shelves sizes [mm]	500x1250 - 5szt, 700x1250 - 1szt
Height [mm]	2180+/-10
Range of temperature [°C]	+2/+8
Cooling power demand [W/linear metre]	1700
Electricity consumption [kWh/24h]	1,3

Additional options add. cost

- Barbados 1.25 cupboard inside made from stainless metal sheet
- Barbados 2.5 cupboard inside made from stainless metal sheet
- extra side lightning
- meat hooks - short
- main top light - internal
- extra charge on base or/and front color
- Side mirror
- insulated side made of zinc coated plate, powder painted - color selection possibility
- insulated side made of zinc coated plate, covered with polyester, color white - full
- top mirrors
- goods securing fence
- fruit and vegetable baskets
- temperature recorder *
- Barbados 1.25 defrosting heaters
- Barbados 2.5 defrosting heaters

-Air temperature + 25 °C, air humidity 65% -Data alteration reserved * -only using IGLOO thermostat